

# Data Sheet



Helping Engineer the Technology of Power

ICE Components, Inc.


Tel 678-560-9172 Fax 678-560-9304

cust.serv@icecomp.com

www.icecomponents.com

1165 Allgood Rd., Ste. #20, Marietta, GA 30062

## Mechanical Drawing

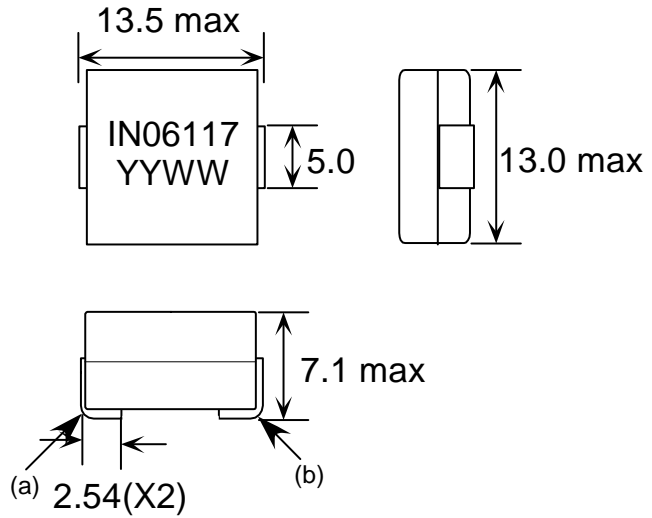

unit:mm

## General Information


<b>Customer</b>	
<b>Part Number</b>	IN06117
<b>Revision</b>	0
<b>Description</b>	Inductor
<b>Date</b>	AUG-07-2009
<b>Reference</b>	--
<b>Doc Control #</b>	--
<b>Issue(For ICE use only)</b>	--

## Specification


## Sample Test Data

Item	Pins	Spec	Test Condition	
Inductance @0Adc	S - F	240 nH +/- 10%	1 MHz, 0.1Vrms, series	
Inductance @Isat at 25degC	S - F	175 nH min	1 MHz, 0.1Vrms, series (50 Adc)	
DCR	S - F	0.165 mOhm +/- 10%	+25 deg C	
Isat at +25degC	S - F	50 Adc max		
Isat at +125degC	S - F	45 Adc max		
Isat at -40degC	S - F	55 Adc max		
Idc	S - F	50 Adc max		

## Schematic



## Recommended PCB Layout

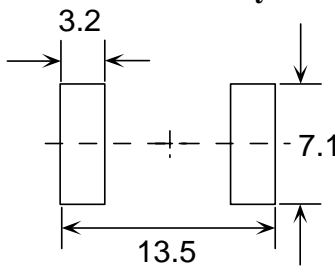

unit:mm

## Remark

1. Isat is the current at which the inductance drops by 15%.
2. Idc is the current at which the temperature of the part increases by 40 deg C.
3. The nominal DCR is measured from point (a) to point (b), as shown on the mechanical drawing.
4. This is RoHS compliant product.
5. Inductance vs. Current Curve as attached.

Sample approval is required before release to production. Sample specifications take precedence over customer specifications.

Customer Signature

Rev.	Description	PRD	CHK	APP	Date	NTFY
0	Initial release	Emily	Gary	L. L. Chou	2009/8/7	2009/8/7

### Inductance vs. Current

